



F I G. 9

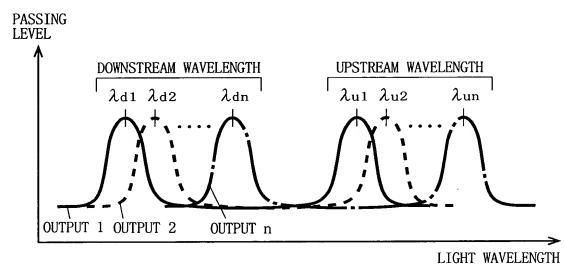


(a)

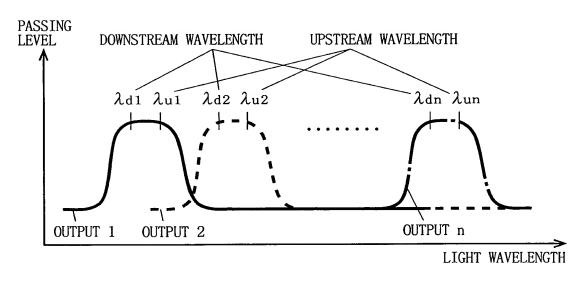


(b)


F I G. 10

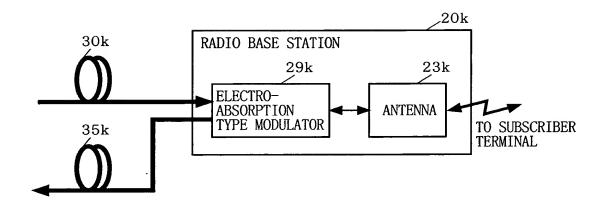

F I G. 11

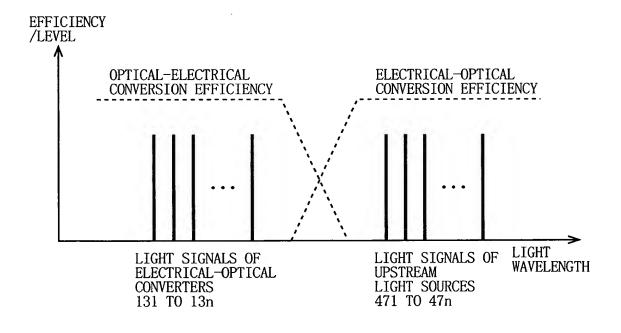



i de la companya de l

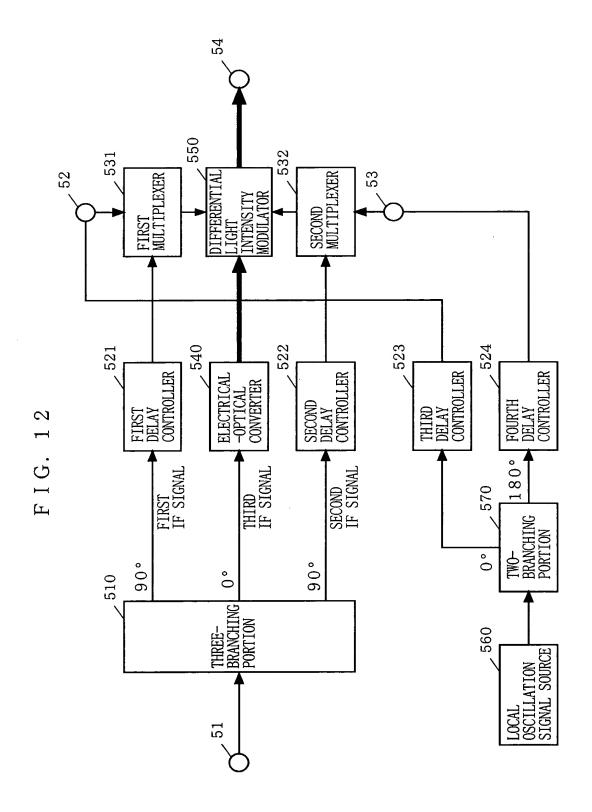

► OUTPUT OF LIGHT SIGNAL OPTICAL WAVEGUIDE OPTICAL FIBER 550 FIG. 13 ELECTRODE FROM FIRST MULTIPLEXER FIRST BIAS ADDITIONAL PORTION ° INPUT OF ELECTRIC SIGNAL FROM SECOND MULTIPLEXER SECOND BIAS ADDITIONAL PORTION ELECTRODE 180° OPTICAL FIBER INPUT OF LIGHT SIGNAL

LIGHT-INTENSITY MODULATOR

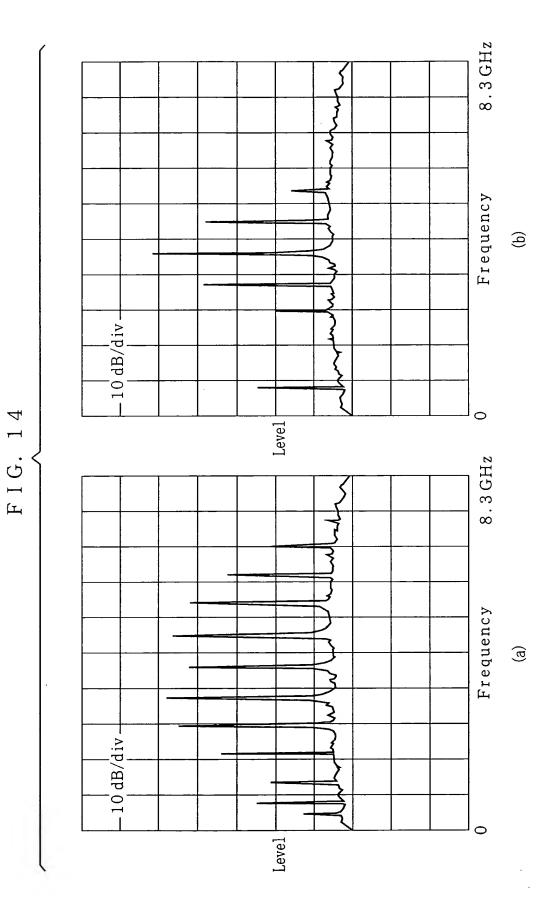

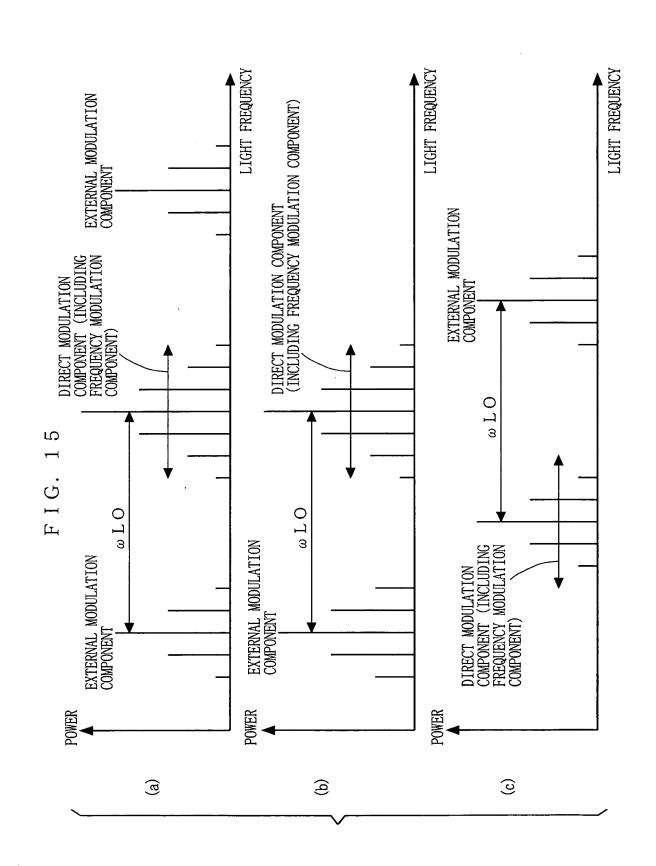

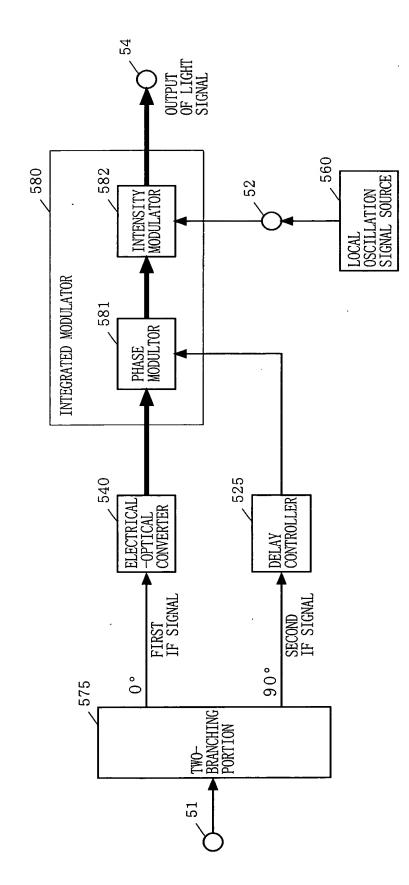


FIG. 16

